



Parallel gripper


with sealed 4-sided guide

Advantages, benefits, comparisons and tips!
Stacks of information all about this product are on page 35.

Gripping force as a function of jaw length

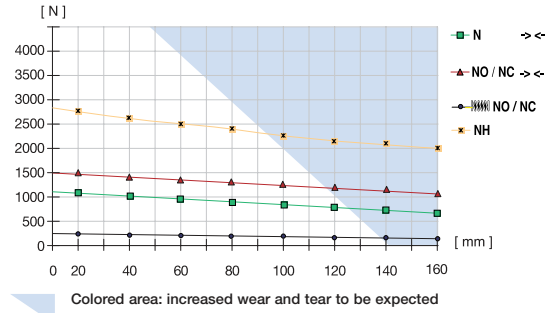

Max Allowable Forces on Jaws

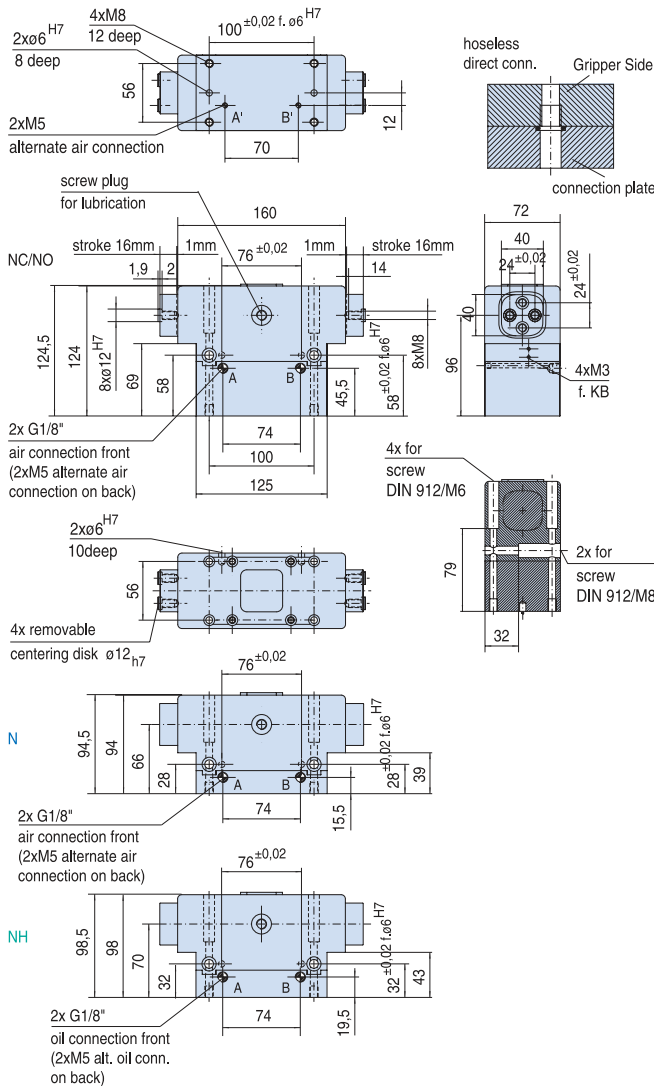

Order no.:

GP1816 N	GP1816 NC	GP1816 NO	GP1816 NH
16	16	16	16
1150	-	-	2750
-	1550	-	-
-	-	1550	-
DSV1/8	Spring	Spring	-
0,1	0,15	0,15	0,3
0,05	0,05	0,05	0,05
4 / 8	5 / 8	5 / 8	10 / 30
150	267	267	-
-	-	-	100
5 / 80	5 / 80	5 / 80	5 / 80
T3	T3	T3	T3
63	63	63	45
3,1	3,7	3,7	3,1

All data measured at 6 bar (hydr. 30 bar).