



POLYURETHANE TIMING BELTS

IMPERIAL-SERIES

H=T1/2"
(12.7mm)

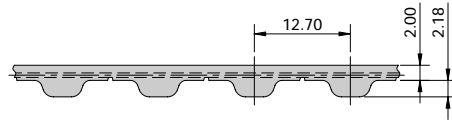

STEEL Tension Member — standard
KEVLAR® Tension Member — optional



TRULY ENDLESS - BFX



Pulleys
page 168

Widths: Standard Belt Widths (in between widths available):

in inch:	0.5	0.75	1.0	1.5	2.0	3.0	4.0
in mm:	12.7	19.05	25.4	38.1	50.8	76.2	101.6


Length/Pitch Code	Length in mm	Number of Teeth
420 H	1066.8	84
450 H	1143.0	90
480 H	1219.2	96
510 H	1295.4	102
540 H	1371.6	108
570 H	1447.8	114
600 H	1524.0	120
630 H	1600.2	126
660 H	1676.4	132
700 H	1778.0	140
750 H	1905.0	150
800 H	2032.0	160

Length/Pitch Code	Length in mm	Number of Teeth
850 H	2159.0	170
900 H	2286.0	180
1000 H	2540.0	200
1100 H	2794.0	220
1250 H	3175.0	250
1400 H	3556.0	280
1700 H	4318.0	340
2000 H	5080.0	400
2300 H	5842.0	460
2600 H	6604.0	520
3000 H	7620.0	600

Further lengths up to 16,002.00 mm (630 inches) available.
Length of timing belt can be increased in increments of one tooth from minimum length of 1,066.8 mm (42 inches).

Available Options (page 149):

- PAZ
- T-Cover
- DL
- DR



Ordering example:

BRECOFLEX Timing Belt **50.8 T1/2"** / **1905 BFX** or **750 H 200 BFX**

Belt Width	_____
Pitch	_____
Length	_____
Truly Endless Length Code BFX	_____