



POLYURETHANE TIMING BELTS

IMPERIAL-SERIES

XH=T7/8"
(22.225mm)

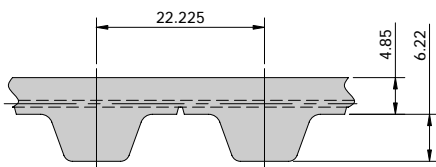

STEEL Tension Member — standard
KEVLAR® Tension Member — optional



OPEN ENDED – M



Widths: Standard Belt Widths (in between widths available):

in inch: 1.0 1.5 2.0 3.0 4.0

in mm: 25.4 38.1 50.8 76.2 101.6

Lengths: Any length available – Stock Rolls: 50 meters (164 feet)

Ordering example:

BRECO Timing Belt 50.8 T7/8" / 1778 M or 700 XH 200 M

Belt Width	_____	_____	_____	_____	_____
Pitch	_____	_____	_____	_____	_____
Length	_____	_____	_____	_____	_____
Open Ended Length Code M	_____				

Available Options (page 149):


• PAZ



• PAR



• PAZ-PAR



SPLICED AND WELDED ENDLESS – V



Widths: Standard Belt Widths (in between widths available):

in inch: 1.0 1.5 2.0 3.0 4.0

in mm: 25.4 38.1 50.8 76.2 101.6

Lengths: Minimum Joined Length: 889 mm (35 inches)
Length of timing belt can be specified in one tooth increments

Ordering example:

BRECO Timing Belt 50.8 T7/8" / 1778 V or 700 XH 200 V

Belt Width	_____	_____	_____	_____	_____
Pitch	_____	_____	_____	_____	_____
Length	_____	_____	_____	_____	_____
Joined Length Code V	_____				

Available Options (page 149):

• PAZ



• PAR




• PAZ-PAR




POLYURETHANE TIMING BELTS

IMPERIAL-SERIES

XH=T7/8"
(22.225mm)

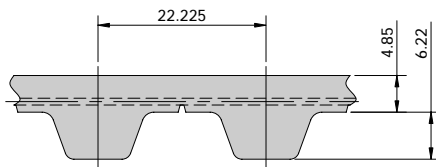

STEEL Tension Member — standard
KEVLAR® Tension Member — optional



TRULY ENDLESS - BFX



Pulleys
page 168

Widths: Standard Belt Widths (in between widths available):
in inch: 0.75 1.0 1.5 2.0 3.0 4.0
in mm: 19.05 25.4 38.1 50.8 76.2 101.6

Length/Pitch Code	Length in mm	Number of Teeth
560 XH	1422.4	64
630 XH	1600.2	72
700 XH	1778.0	80
770 XH	1955.8	88
840 XH	2133.6	96
980 XH	2489.2	112
1120 XH	2844.8	128
1260 XH	3200.4	144

Length/Pitch Code	Length in mm	Number of Teeth
1400 XH	3556.0	160
1540 XH	3911.6	176
1750 XH	4445.0	200
1960 XH	4978.4	224
2275 XH	5778.5	260
2450 XH	6223.0	280
3500 XH	8890.0	400

Further lengths up to 16,002.0 mm (630 inches) available.
Length of belt can be increased in increments of one tooth from minimum length of 1,422.4 mm (56 inches).

Ordering example:

BRECOFLEX Timing Belt 50.8 T7/8" / 1778 BFX or 700 XH 200 BFX

Belt Width _____
Pitch _____
Length _____
Truly endless length BFX _____

Available Options (page 149):

- PAZ

